

## Bosch Solution 64 Alarm Panel

- ✓ **Panel Dialler wiring**
- ✓ **Panel Dialler programming**




### **Background:**

Permaconn communicators have a terminal block for the connection of the female 611 fly lead (supplied). If the Alarm Panel also has a terminal block for PSTN connection, we recommend you use your own cable between the Alarm Panel dialler and the Permaconn communicator. This type of installation negates the use of the female 611 fly lead, decreasing your installation time. For four (4), six (6) and eight (8) pin RJ connectors, please refer to manufactures wiring diagram.

There are five (5) minimum requirements from the Alarm panel for successful communication:

- 1) Must have an eight (8) digit primary phone. E.g. 12345678.
- 2) A four (4) digit account number.
- 3) Must be Contact ID format.
- 4) Must be set for tone (DTMF) dialling.
- 5) Open / Close reporting, must be enabled for Pocket Secure App.

### **Dialler Lead wiring between Permaconn and Bosch Solution 64 Alarm Panel:**

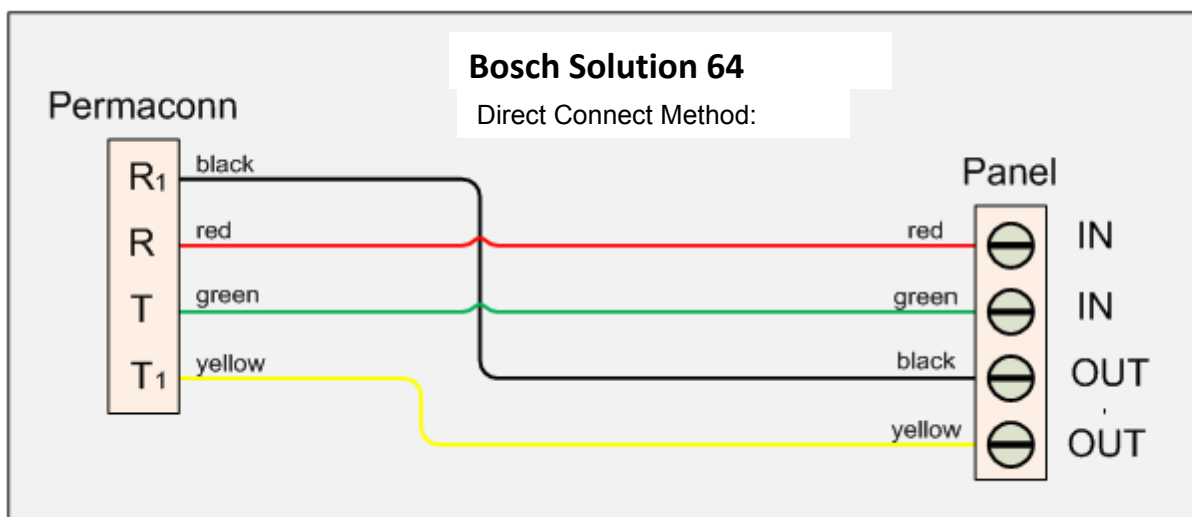

**Press and hold the 'Mail' key to send an immediate test report.**

**Programming the Bosch Solution 64 Alarm Panel for dialler operation:**

Area 1: Account/client ID  
Menu 2-2-0 e.g. 1234000000

Open / Close Route  
Menu 2-2-2: **Must be set to 1** (used for Pocket Secure App)

Report Route  
Menu 3-1-6: **Must be set to 1**

Phone Number 1 – Area 1 – 0=10  
Menu 5-1-1: e.g. 12345678

Dialling Options  
Menu 5-2-1:  
    **1** Dialler Enabled Y  
    **2** Pulse Dialling N

Transmission Format – Area 1  
Menu 5-4-0: **Must be set to 1** (Contact ID)

Open/Close Reports  
Menu 1-4-2: Option 6 must be 'Y' (Pocket Secure App)