



## QUICK START GUIDE

For further information, please visit <https://safedial.permaconn.com>

## ACTIVATE ONLINE - SAVE TIME!

<https://safedial.permaconn.com>

### 1 ACTIVATE YOUR UNIT ONLINE

Flip over this pamphlet for instructions

### 2 WIRE YOUR UNIT

As per diagram below or website


<https://globewireless.com.au/technical-support>

### 3 SEND AN EVENT

Trigger an event from the Alarm Panel

### 4 CONTACT CONTROL ROOM

Confirm your event was received

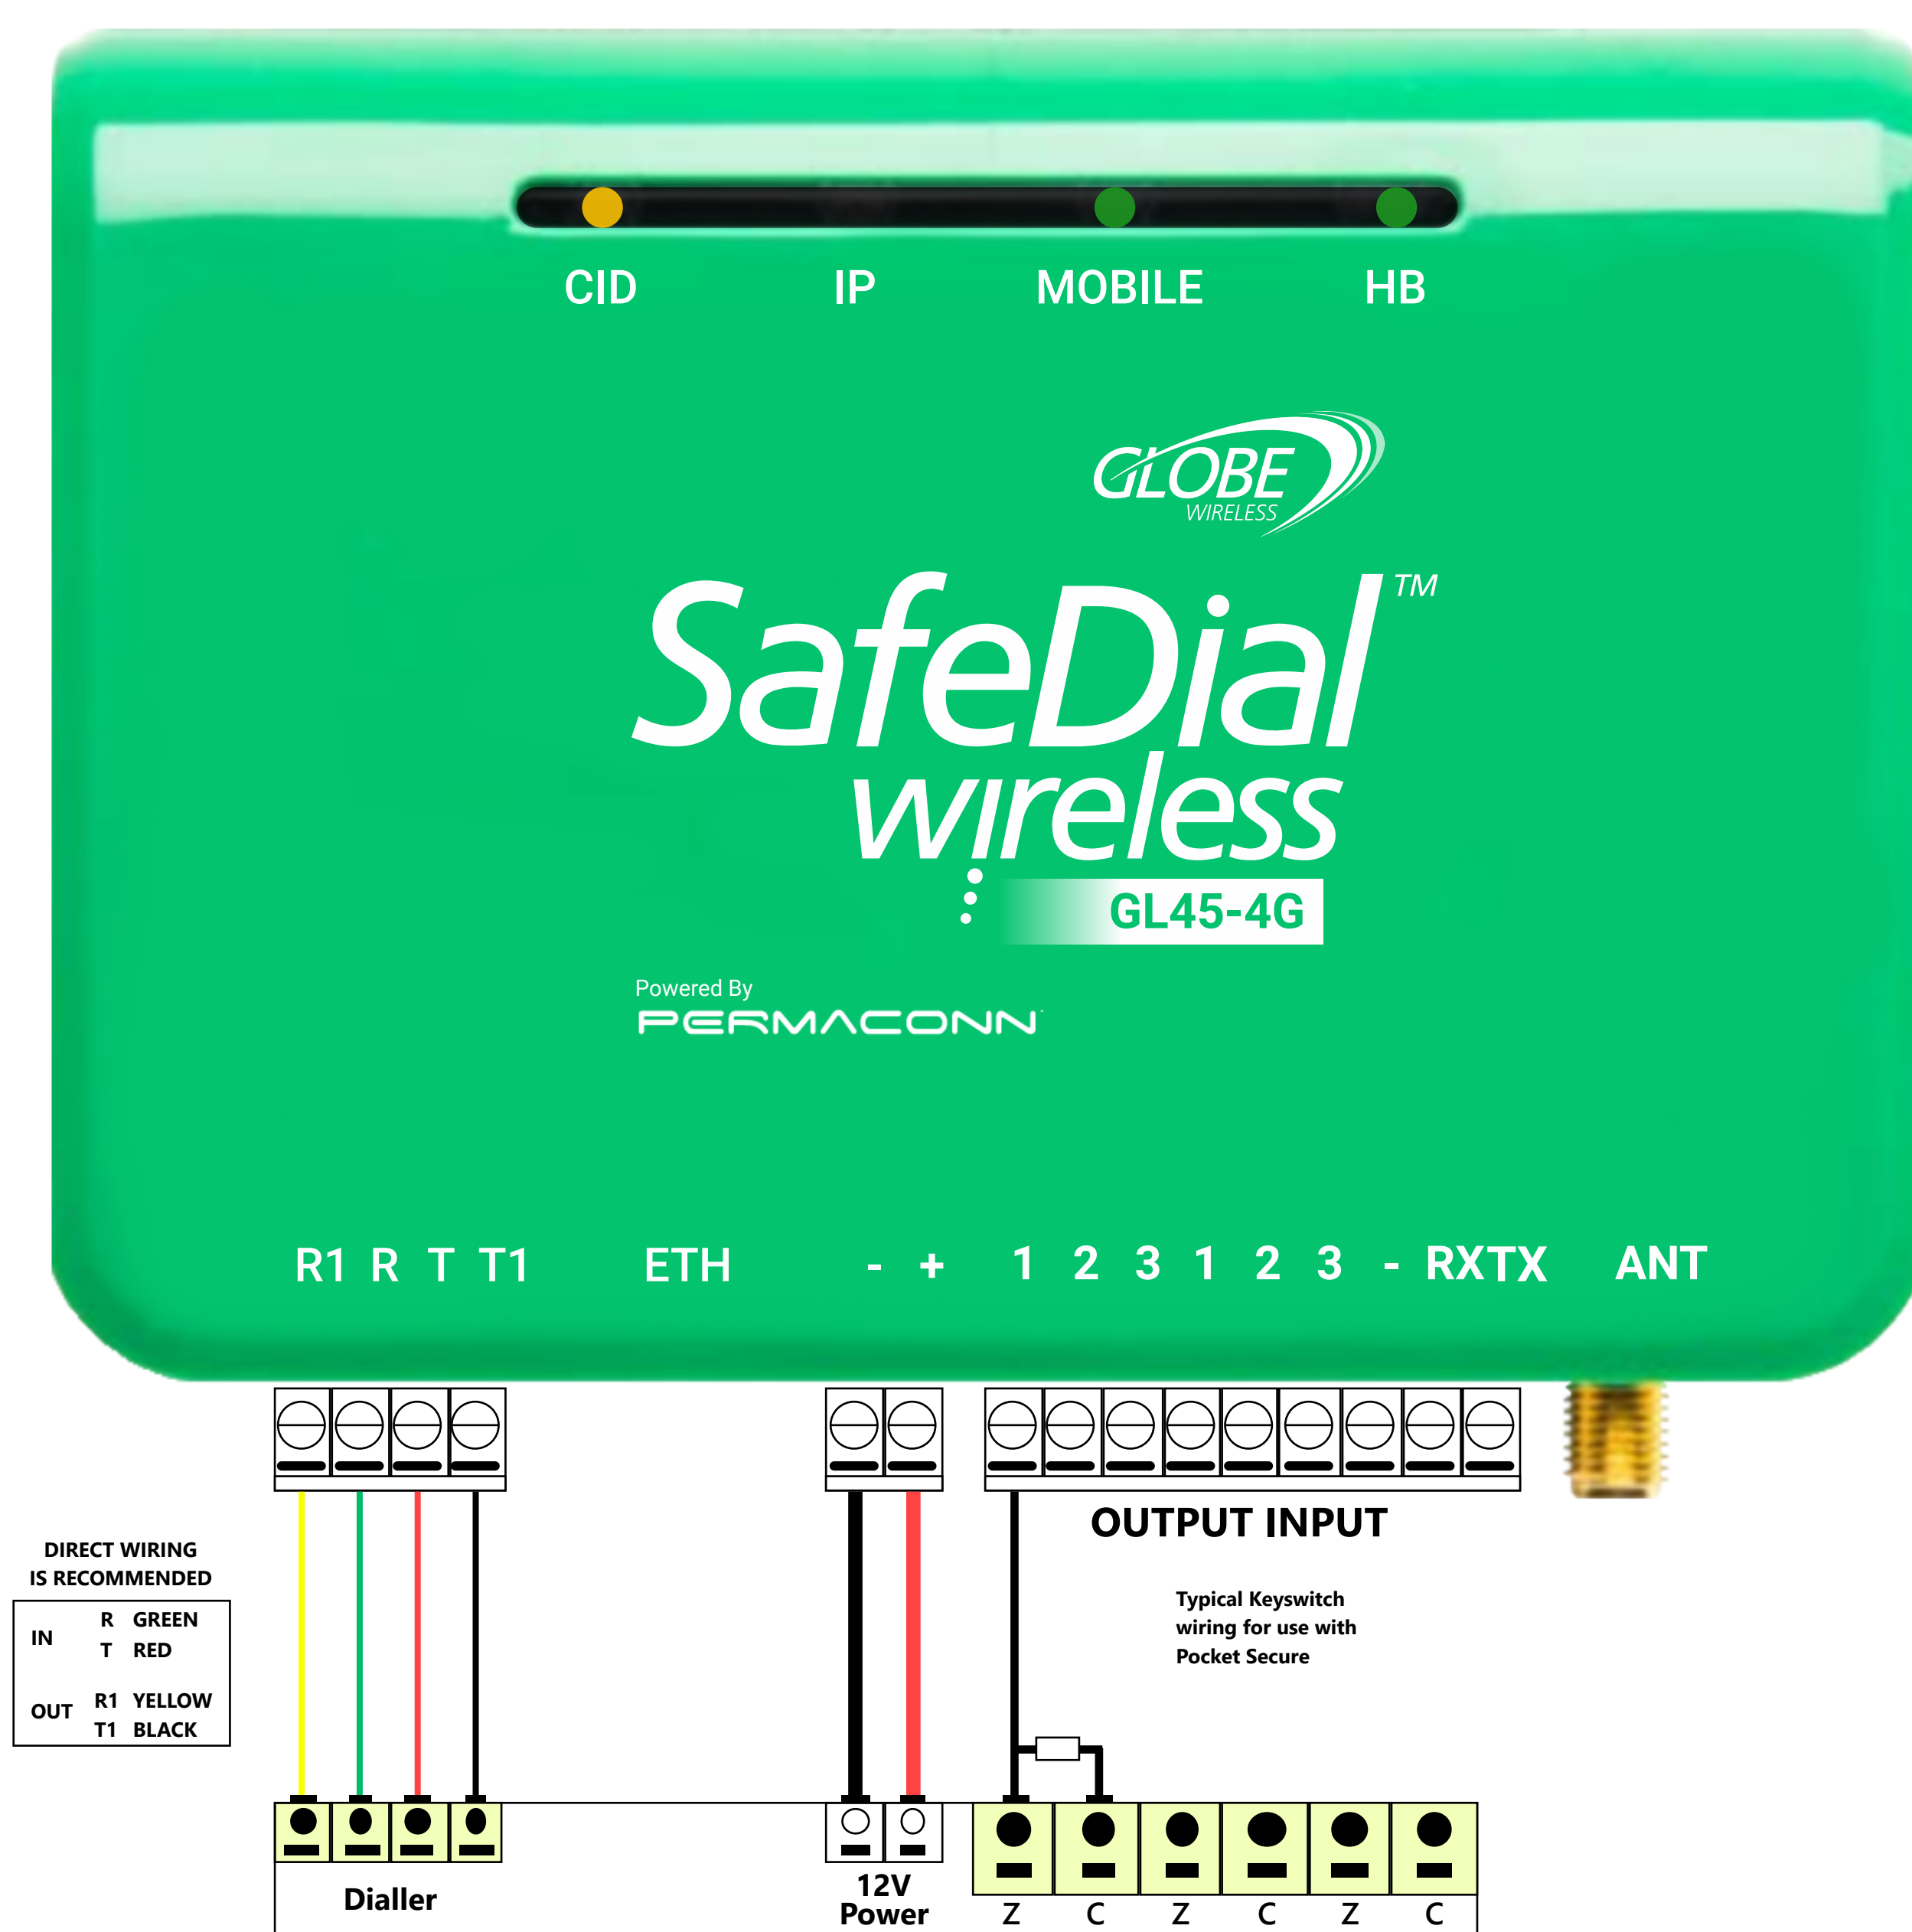

### ACTIVATIONS

Go Online and Save Time  
<https://safedial.permaconn.com>



### CANCELLATIONS & TRANSFERS

Send an Email to Support  
[support@globetelecom.com.au](mailto:support@globetelecom.com.au)



### TECHNICAL DOCS


Connection Details available at:  
<https://globewireless.com.au/technical-support>



Login to SafeDial Toolbox to ACTIVATE units and CREATE PocketSecure users  
<https://safedial.permaconn.com>

## 1. ACTIVATE A SAFEDIAL

Click **FLEET** then **ACTIVATE**

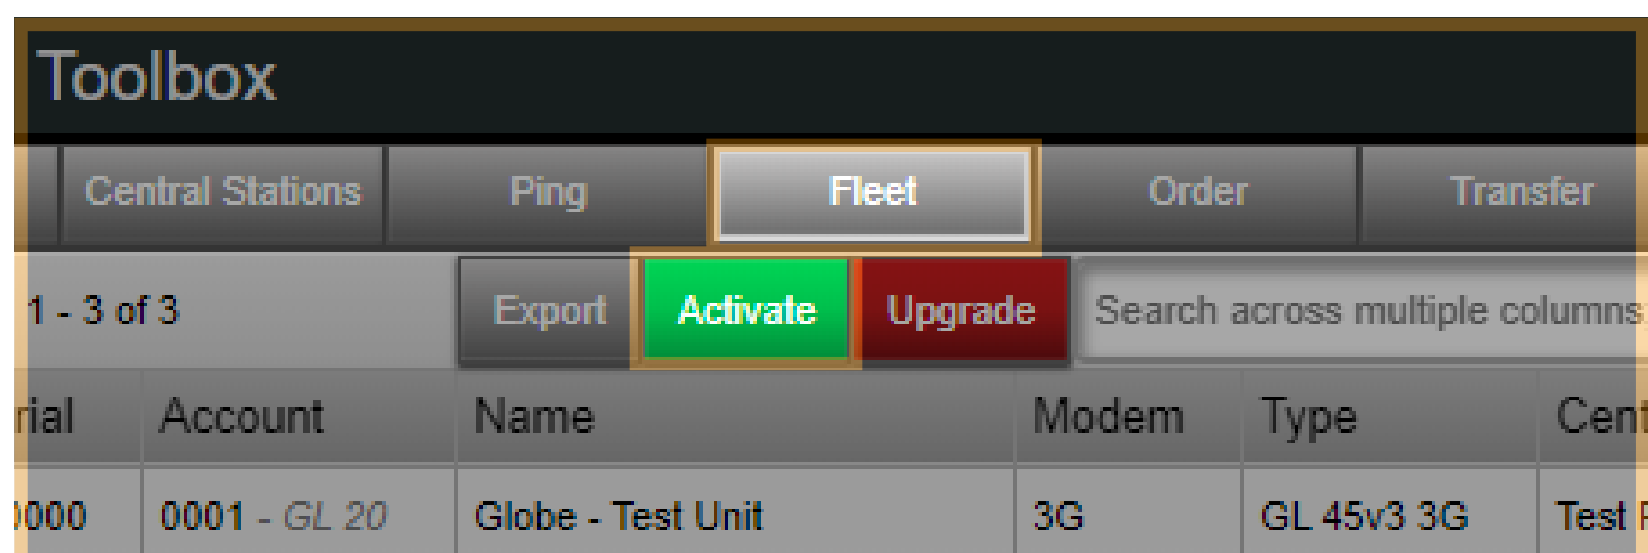


Enter your **SERIAL NUMBER**

Add **DETAILS**

Confirm **ACTIVATION**

## 2. CREATE POCKETSECURE USER

Click **USERS** then **CREATE USER**

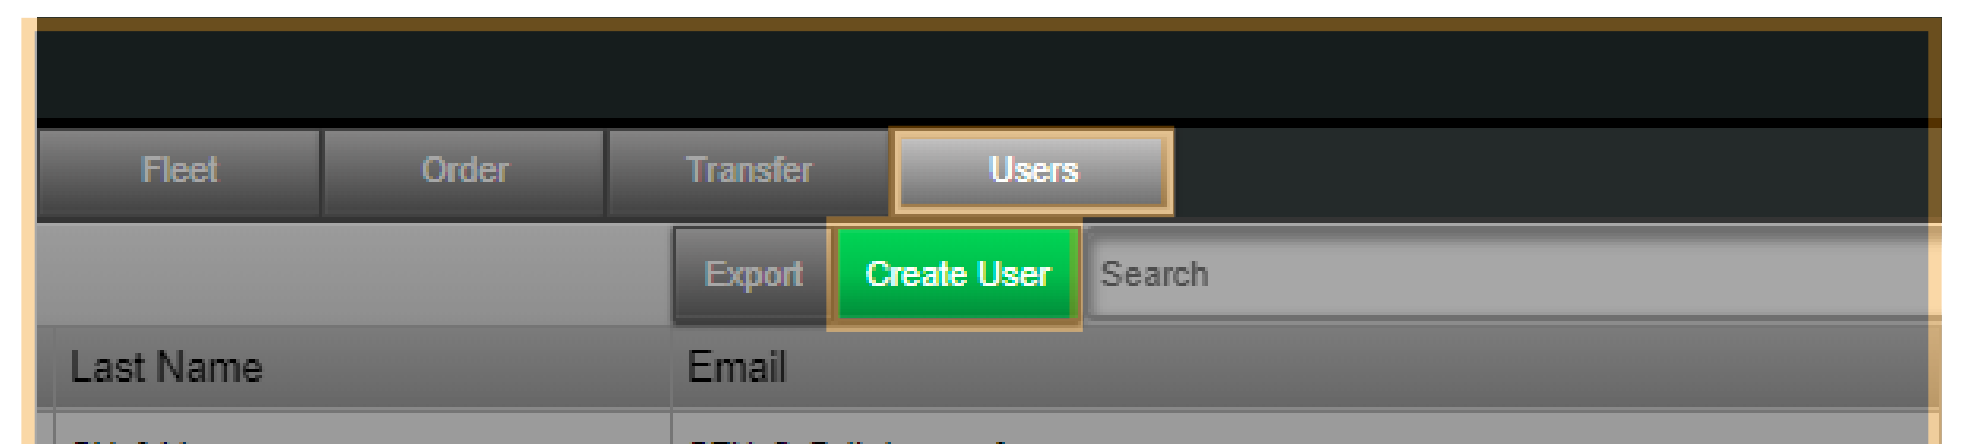

Add **END USER DETAILS**

NB: Password must be at least 8 characters, with 1 capital letter & 1 number

Add **UNIT/S**

Type in your serial number & select the unit from the list that appears.  
Once confirmed & you select 'OK' an SMS will be sent to your customer

**Note: An arm & disarm MUST be sent for PocketSecure to work**

**Note: If the unit is already powered up, power cycle for faster network registration**